

MODEL: 50830

ASSEMBLY INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

UNPACK THE FOUNTAIN

YOU SHOULD HAVE RECEIVED THE FOLLOWING PARTS IN THE PACKAGE: UPPER LID, FOUNTAIN BODY, (4) SUBMERSIBLE HALOGEN BULBS, TRANSFORMER, SUBMERSIBLE PUMP, SPLASHGUARD AND LOWER LID. TO PROTECT THE FINISH, PLACE ALL PARTS ON A SOFT SURFACE.

NOTE: WALL MOUNTING HARDWARE NOT INCLUDED. (SEE STEP #8)

FOUNTAIN ASSEMBLY

1. ATTACH FOUNTAIN HOSE TO SUBMERSIBLE PUMP.
2. FEED LIGHT POWER CORD UP THROUGH HOLE IN BACK OF FOUNTAIN BODY AND WORKING UPWARDS TOWARD TOP OF FOUNTAIN.
3. PLACE PUMP FLAT IN RESERVOIR.
4. SLIDE BULB UNDER BULB COVER AND SECURE IN BULB CLIP. PLACE THE UPPER LID ON TOP OF FOUNTAIN. (PLEASE RETAIN THE OTHER SUBMERSIBLE HALOGEN BULBS FOR FUTURE BULB REPLACEMENT.)
5. PLACE THE UPPER LID ON TOP OF FOUNTAIN.
6. SLIDE THE LOWER LID INTO THE SLOTS ON BACK OF FOUNTAIN BODY AS SHOWN.

FOR FLOOR APPLICATIONS: SKIP TO STEP #9.

FOR WALL MOUNTED APPLICATIONS:

7. LOCATE DESIRED POSITION ON WALL.
8. PLACE HOOK OR NAIL (NOT INCLUDED, CHOOSE AN ATTACHMENT MECHANISM APPROPRIATE FOR YOUR WALL) IN WALL AND SECURE FOUNTAIN TO WALL BY PLACING HOOKS OR NAILS IN BRACKETS.
9. ATTACH SPLASHGUARD ONTO THE EDGE OF THE RESERVOIR AS SHOWN.
10. FILL RESERVOIR WITH ENOUGH WATER TO COMPLETELY SUBMERSE PUMP. (DISTILLED WATER IS RECOMMENDED BY US TO REDUCE MINERAL DEPOSITS AND BACTERIA BUILD UP.)
11. JOIN THE CONNECTOR TOGETHER AND PLUG THE POWER CORD INTO SOCKET.
12. TURN ON AT SWITCH, YOUR FOUNTAIN IS READY TO USE.

TROUBLE SHOOTING:

1. IF YOUR FOUNTAIN DOES NOT WORK, CHECK PLUG AT THE SOCKET. MAKE SURE THE PLUG IS FULLY AND PROPERLY INSERTED INTO THE WALL OUTLET.
2. NEXT CHECK TO MAKE SURE THE OUTLET IS POWERED.
3. IF THE FOUNTAIN STILL DOES NOT WORK, PLEASE CONTACT YOUR DISTRIBUTOR OR PLACE OF PURCHASE.

SPLASHING DISCLAIMER:

SPLASHING MAY OCCUR WHEN FOUNTAIN IS INITIALLY TURNED ON. PROTECT SURROUNDING SURFACES AS NEEDED.


WATER:

TO REDUCE MINERAL DEPOSITS AND BACTERIA BUILD UP THE USE OF DISTILLED WATER IS RECOMMENDED.

WARNING:

- * THIS FOUNTAIN IS RATED FOR INDOOR USE ONLY.
- ** ONCE A WEEK INSPECT FOUNTAIN, FLOOR AND ADJACENT WALL FOR MOISTURE BUILD-UP AND CLEAN AS NECESSARY. THIS IS ESPECIALLY IMPORTANT FOR HUMID ENVIRONMENTS.
- *** THIS UNIT MUST BE CONNECTED TO A SUPPLY CIRCUIT THAT IS PROTECTED BY A GROUND FAULT CIRCUIT INTERRUPTER (GFCI). THE GFCI SHOULD BE TESTED ON A ROUTINE BASIS. TO TEST THE GFCI, PUSH THE TEST BUTTON. THE GFCI SHOULD INTERRUPT POWER. PUSH THE RESET BUTTON. POWER SHOULD BE RESTORED. IF THE GFCI FAILS TO OPERATE IN THIS MANNER, THE GFCI IS DEFECTIVE.

IMPORTANT PUMP INFORMATION: PUMP MUST BE FULLY SUBMERSED IN WATER WHILE OPERATING.

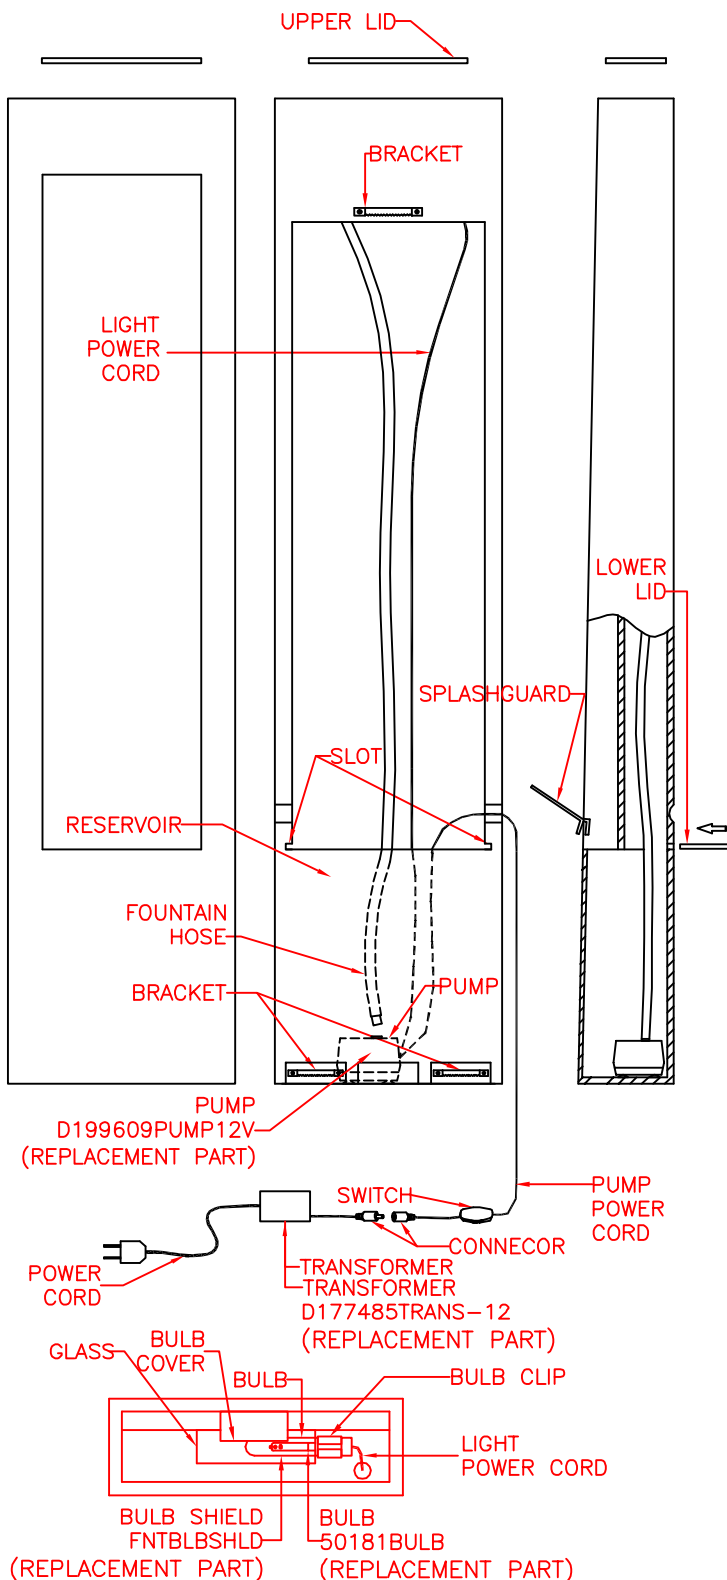

IMPORTANT SAFETY INSTRUCTIONS:

THIS FOUNTAIN HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF THE PLUG DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS PLUG CAN BE FULLY INSERTED. DO NOT ALTER THE PLUG.

AVAILABLE PARTS ARE:
D177485TRANS-12 (TRANSFORMER)
D199609PUMP12V (PUMP)
50181BULB (BULB)
FNTBLBSHLD (BULB SHIELD)